



INVESTOR IN PEOPLE


The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

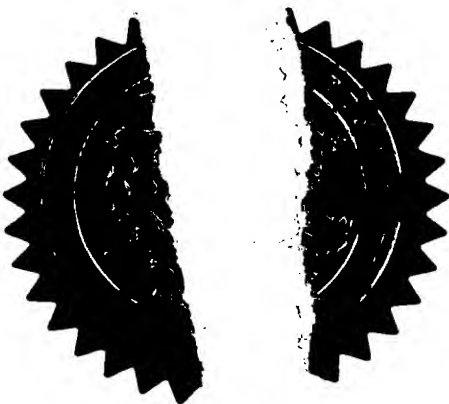

Signed



Andrew Gensay

Dated

25 January 2001

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

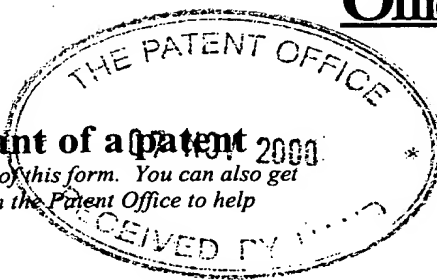

08NOV00 E581927-6 D02926
P01/7700 0.00-0027205 The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	BP-09-0026		
2.	Patent application number (The Patent Office will fill in this part)	0027205.4		
3.	Full name, address and postcode of the or of each applicant (underline all surnames)	Illinois Tool Works Inc, 3600 West Lake Avenue Glenview, Illinois 60025 United States of America		
	Patents ADP number (if you know it)	511618002		
	If the applicant is a corporate body, give the country/state of its incorporation	Incorporated in the State of Delaware, United States of America		
4.	Title of the invention	WEATHER RESISTANT ANTI-SLIP PANELS		
5.	Name of your agent (if you have one)	Phillips & Leigh		
	"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	5 Pemberton Row London WC1V 7QF		
	Patents ADP number (if you know it)	0001289001		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
		GB	0006962.5	22 March 2000
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application		Date of filing (day / month / year)
8.	Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	YES		

Patents Form 1/77

Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form -

Description 6

Claim(s) 4

Abstract -

Drawing(s) -



10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*) To follow

Request for substantive examination (*Patents Form 10/77*) To follow


Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

7 November 2000

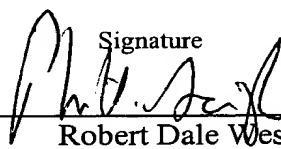

12. Name and daytime telephone number of person to contact in the United Kingdom

Robert Dale Weston 020 7822 8888

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

WEATHER RESISTANT ANTI-SLIP PANELS

This invention relates to weather resistant anti-slip rigid flooring panels and the like pre-formed and pre-coated anti-slip products; hereinafter referred to as weather resistant anti-slip panels.

Known weather resistant anti-slip panels are, typically formed from rigid wood panels, for example of plywood or the like weather vulnerable material, to the working surface only of which an anti-slip aggregate of sharp, aluminium oxide or silicon carbide particles is bonded with a resin bonding agent. These panels are used outside or inside where an anti-slip surface has to be maintained in adverse, slippery conditions. Weather resistant anti-slip panels may, for example, be used as stair treads, and thus the panels have to be sufficiently rigid for the mechanical requirements of such an given application. The aggregate has to maintain its anti-slip over time in the aforesaid conditions and is thus of very hard, sharp particulate material.

All the outer surfaces are coated so as to protect and enhance the weather durability of the wooden substrate. Weather resistant anti-slip panels are now being made with a rigid synthetic or weather resistant substrate, such as glass reinforced plastic, that does not need to be weather proofed and are provided with the anti-slip coating restricted to the working surface or surfaces. The problem with known weather resistant anti-slip panels is that the anti-slip coating particles, being very hard, make the anti-slip coating very difficult to cut or drill, as it readily and speedily blunts a cutting tool. Consequently, weather resistant anti-slip panels are currently either only made to standard sizes or shapes or to specified sizes and shapes and with pre-specified placement of fixing holes, in each case being cut, drilled or otherwise formed prior to application of the anti-slip coating. The standard sized panels obviously limit usage and the special sized panels are, obviously, more expensive to produce. People do attempt to cut or drill weather resistant anti-slip panels on site, using angle grinders, diamond cutters, carbide-tipped twist drills and similar special tools; but generally without success, as even the special tools are damaged and blunted by the anti-slip aggregate and the consequent aesthetics are consequently poor.

Document GB 2200578 A (Armstrong World Industries Inc.) discloses a surface covering product which comprises a substrate material, an impervious coating upon said material, and raised elements selectively printed upon said coating, which raised elements comprise or are

derived from a thixotropic plastic containing particles of solid material. Such product creates embossed-in-register features without the need for chemical or mechanical embossing materials. Substrate materials are described as being "Any substrate may be employed in the product and method of the invention, more especially, any of the substrates normally employed in the field. A suitable substrate may be the plastisol-saturated glass mat described in Example 1 below, or a wet-laid felted sheet, also common in the surface covering art" (page 6, lines 3 to 8). The solid particles are described as being "an organic material such, for example as rubber or a plastic material, such as vinyl resin, or an inorganic materials such as, silica quartz." (page 11, lines 15 to 19).

Document W0 96/03270 A (Custom Plastics Molding Inc.) discloses a "thermoformed plastic product such as a track bed liner, having an anti-slip surface is formed. A clean surface of a sheet of, for example HDPE, is masked. Droplets of a sprayable or liquid polymer, such as a thermosetting elastomeric polymer are sprayed or otherwise applied onto the exposed masked off surface area. The droplets form a stippled pattern of primarily separate bumps which upon hardening are hard, but not brittle. After partial hardening of the bumps, the plastic sheet is thermoformed." (Abstract).

Document, US 5601900 A (Doscher) discloses an "anti-skid mat for placement upon a slippery surface comprising a resilient matrix sheet member having a top surface and a bottom surface. An abrasive structure on the bottom surface of the resilient matrix sheet member is for preventing slippage of the resilient matrix sheet member on the slippery support surface."(Abstract).

None of these documents disclose the rigid substrates or hard, sharp particles required by the above described weather resistant anti-slip panels and thus do not exhibit the described technical problem of being difficult or impossible to work, that is to cut or drill on-site.

According to the present invention, a method of shaping a weather resistant anti-slip panel comprises producing a pattern of cuttable lines in a cut-resistant, anti-slip coating on a rigid substrate and subsequently cutting the substrate along selected lines to obtain a desired panel shape.

In a first embodiment of the method of the present invention, the substrate is weather resistant and the cut-resistant, anti-slip coating is solely applied to a working surface of the substrate.

5

In a second embodiment of the method of the present invention, the substrate is weather vulnerable, is weather vulnerable, the whole of the outside of the substrate is coated and the pattern of aggregate-free lines or the like is solely applied to a working surface of the substrate.

10

A third embodiment of the method of the present invention comprises producing a pattern of drillable areas in the cut-resistant anti-slip coating and subsequently drilling the substrate at selected areas to obtain a desired placement of fixing holes.

15 A fourth embodiment of the method of the present invention comprises producing a pattern of cuttable lines which intersect to form the pattern of drillable areas.

Also according to the present invention, a shapeable weather resistant anti-slip panel has a cut-resistant anti-slip coating on a rigid substrate and a pattern of cuttable lines therein; whereby, in use, the substrate may be cut along selected lines to obtain a desired panel shape.

20

According to a first embodiment of the apparatus of the present invention, the substrate is weather resistant and has the cut-resistant, anti-slip coating solely on a working surface of the substrate.

25

According to a second embodiment of the apparatus of the present invention, the substrate is weather vulnerable, the whole of the substrate is coated and the pattern of intersecting lines is solely applied to a working surface of the substrate.

30 According to a third embodiment of the apparatus of the present invention, the panel has a pattern of drillable areas in the cut-resistant coating; whereby, in use, the substrate can be drilled at selected areas to obtain a desired placement of fixing holes.

According to a fourth embodiment of the present invention, the panel has a pattern of intersecting cuttable lines to form the pattern of drillable areas.

A weather resistant anti-slip panel in accordance with the present invention overcomes the above-stated problems because it can simply and readily be cut to shape or have fixing holes drilled on site.

A weather resistant anti-slip panel in accordance with the present invention, has the additional advantage that the cuttable lines also form cutting guide lines.

The pattern of cuttable lines may be of:-

- a standard rectangular grid, to various dimensions;
- a diagonal or rhombic design;
- simple perpendicular or parallel lines, for stair tread panels;
- or,
- circular or other shaped lines defining coating free areas for fixing holes or cut outs.

The above and other features of the present invention are illustrated by the following example.

Example (a weather resistant anti-slip panel)

A sheet of weather resistant, glass reinforced, rigid plastic, for example an unsaturated polyester based on an orthophthalic resin filled with e-glass fibre, 2000-3000 mm long x 1000-2000 mm wide x 3-3.5 mm thick; forms a substrate having a Shore D hardness between 80 and 100 (American Standard Test Method ASTM 2240). A fixed, panel test piece 100 mm long x 20 mm wide x 3.5 mm thick has a maximum panel deflection of 25° when 1 kg is suspended from the free end of the test piece. The panel has a regular grid pattern of 25 mm squares formed on the working surface thereof by laying down lines of 5 mm wide self-adhesive masking tape; the intersections of the grid lines form drilling areas or points for fixing holes. A coating of a base resin, for example an unsaturated polyester based on an orthophthalic resin, was then applied to the working surface with a coverage of approximately 0.1-0.15 kg per sq. metre and aluminium oxide aggregate particle size 0.85-1.7

working surface, along which the weather resistant anti-slip panel can be cut or drilled on site.

5 Whilst the invention has been described with reference to simply-shaped sheet substrates, it is equally applicable to stair treads with pre-formed nosing or other particularly shaped GRP or plastics substrates or mouldings.

CLAIMS:

1. A method of shaping a weather-resistant anti-slip panel comprising producing a pattern of cuttable lines in a cut-resistant anti-slip coating on a rigid substrate and subsequently cutting the substrate along selected lines to obtain a desired panel shape.
2. A method as claimed in claim 1 wherein the substrate is weather resistant and the cut-resistant, anti-slip coating is solely applied to a working surface of the substrate.
3. A method as claimed in claim 1 wherein the substrate is weather vulnerable, the whole of the outside of the substrate is coated and the pattern of aggregate-free lines or the like is solely applied to a working surface of the substrate.
4. A method as claimed in any of claims 1 to 3 comprising producing a pattern of drillable areas in the cut-resistant anti-slip coating and subsequently drilling the substrate.
5. A method as claimed in claim 4 comprising producing a pattern of intersecting cuttable lines to form the pattern of drillable areas at the intersections thereof.
6. A shapeable, weather-resistant anti-slip panel having a cut-resistant anti-slip coating on a rigid substrate and having a pattern of cuttable lines therein; whereby, in use, the substrate can be cut along selected lines to obtain a desired panel shape.
7. A panel as claimed in claim 6 wherein the substrate is weather resistant and has the cut-resistant, anti-slip coating solely on a working surface of the substrate.
8. A panel as claimed in claim 6 wherein the substrate is weather vulnerable, the whole of the substrate is coated and the pattern of intersecting lines is solely applied to a working surface of the substrate.

9. A panel as claimed in any of claims 6 to 8 and having a pattern of drillable areas in the cut-resistant coating; whereby, in use, the substrate can be drilled at selected areas to obtain a desired placement of fixing holes.
- 5 10. A panel as claimed in claim 9 and having a pattern of intersecting lines to form the pattern of drillable areas.
11. A panel as claimed in any of claims 6 to 10, wherein the pattern comprises anti-slip cuttable lines or drillable areas on the or each working surface thereof.
- 10 12. A panel as claimed in any of claims 6 to 11, wherein the anti-slip coating comprises anti-slip particles in an adherent coating.
13. A panel as claimed in claim 11 or claim 12, wherein the or each working surface has a
15 pattern of anti-slip particles embedded therein.
14. A panel as claimed in claim 8 or claim 9, wherein the pattern comprises particle-free lines or areas of coated substrate.
- 20 15. A panel as claimed in any of claims 6 to 14, wherein the substrate has a Shore D hardness of between 80 and 100.
16. A panel as claimed in any of claims 6 to 15, wherein the substrate has a maximum
25 deflection of 25° when 1 kg is suspended from a fixed panel test piece 100 mm long x 20 mm wide x 3-3.5 mm thick.
17. A panel as claimed in any of claims 6 to 16, wherein the cut-resistant anti-slip coating includes an angular and cubic particulate with a Polished Stone Value of between 50 to 100 and a mohs hardness of between 9 and 10.
- 30 18. A method of shaping a weather-resistant anti-slip panel substantially as described.
19. A shapeable, weather-resistant anti-slip panel substantially as described.

20. A shapeable, weather-resistant anti-slip panel having:-
 - i) a rigid substrate having a maximum deflection of 25° when 1 kg is suspended from a fixed panel test piece 100 mm long x 20 mm wide x 3-3.5 mm thick;
 - 5 ii) a cut-resistant anti-slip coating on a surface of the substrate;
and,
 - iii) a pattern of cuttable lines in said coating.
- 10 21. A panel as claimed in claim 20, wherein the substrate is of a weather resistant material and the cut-resistant, anti-slip coating is solely on a working surface of the substrate.
- 15 22. A panel as claimed in claim 21 wherein the weather-resistant substrate material is selected from the class comprising glass reinforced plastic; resin; thermo-set or thermo-plastic materials.
- 20 23. A panel as claimed in claim 20, wherein the substrate is weather vulnerable, the whole of the substrate is coated and the pattern of intersecting lines is solely applied to a working surface of the substrate.
24. A panel as claimed in claim 20, wherein the weather vulnerable substrate material is wood.
- 25 25. A shapeable, weather-resistant anti-slip panel having:-
 - i) a rigid substrate having a Shore D hardness of between 80 and 100;
 - ii) a cut-resistant anti-slip coating on a surface of the substrate;
and,
 - iii) a pattern of cuttable lines in said coating.
- 30 26. A panel as claimed in claim 25, wherein the substrate is of a weather resistant material and the cut-resistant, anti-slip coating is solely on a working surface of the substrate.

27. A panel as claimed in claim 26, wherein the weather-resistant substrate material is selected from the class comprising glass reinforced, plastic; resin; thermo-set or thermo-plastic materials.
- 5 28. A panel as claimed in claim 25, wherein the substrate is weather vulnerable, the whole of the substrate is coated and the pattern of intersecting lines is solely applied to a working surface of the substrate.
- 10 29. A panel a claimed in claim 28, wherein the weather vulnerable substrate material is wood.
30. A shapeable, weather-resistant anti-slip panel having:-
i) a rigid substrate;
ii) a cut-resistant anti-slip coating including an angular and cubic particulate with
15 a Polished Stone Value of between 50 to 100 and a mohs hardness of between 9 and 10 on a surface of the substrate;
and,
iii) a pattern of cuttable lines in said coating.
- 20 31. A panel as claimed in claim 30, wherein the substrate is of a weather resistant material and the cut-resistant, anti-slip coating is solely on a working surface of the substrate.
- 25 32. A panel as claimed in claim 31, wherein the weather-resistant substrate material is selected from the class comprising glass reinforced, plastic; resin; thermo-set or thermo-plastic materials.
- 30 33. A panel as claimed in claim 30, wherein the substrate is weather vulnerable, the whole of the substrate is coated and the pattern of intersecting lines is solely applied to a working surface of the substrate.
34. A panel a claimed in claim 33, wherein the weather vulnerable substrate material is wood.